

## Scroll compressor soft starter series




# Switch

# RSBS, RSBD & RSBT

## Scroll compressor soft starter series

### Where does the need for Scroll Compressor Softstarters come from?

Scroll compressors have earned a strong reputation in HVAC applications by proving to be a more reliable and efficient solution than other categories of compressors. Scroll compressors are generally 10 to 15% more efficient than piston compressors. Worldwide initiatives promoting energy efficiency in the building sector are generating a growing interest for more cost saving and efficient HVAC solutions, making the use of scroll compressors more and more a necessity.

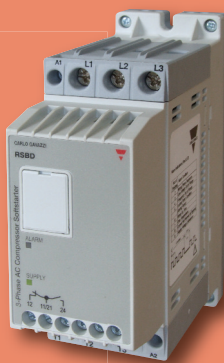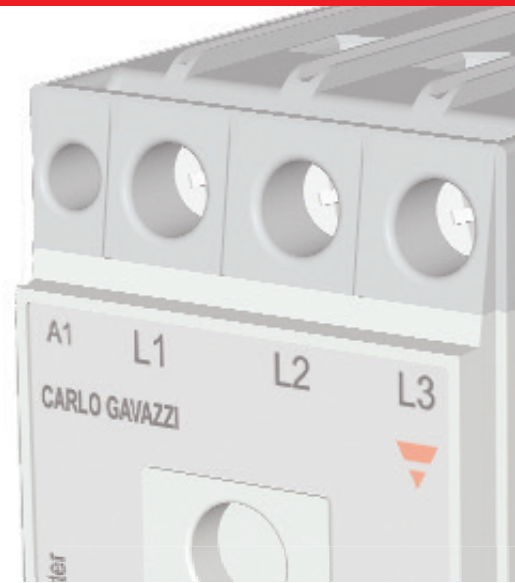

## A complete range of scroll compressor soft starters

### Scroll Compressor High Starting Currents

Starting scroll compressors via direct on line (DOL) methods results in a high inrush current typically 6 to 8 times the rated compressor current.

Such levels of current inevitably cause a number of undesirable effects including

- Light flickering
- Triggering of protection equipment
- Increased compressor noise and vibration
- Excessive stresses on compressor
- Voltage fluctuations and disturbances on neighboring equipment

### Benefits of Soft Starting Solutions

Carlo Gavazzi's line of dedicated scroll compressor soft starters RSBS, RSBD and RSBT is the result of an extensive study of scroll compressor systems together with a continuous communication with our customers.

RSBS, RSBD and RSBT soft starters are equipped with specific algorithms to reduce the high starting currents thereby resulting in

- Elimination of light flickering
- Reduction in voltage disturbances
- Increased compressor lifetime

Additionally, by limiting starting current to more than 50%\* with respect to DOL start, additional benefits can be achieved such as

- lower-rating protection devices and cabling
- less expensive contracts with utility companies

\* typical for RSBS, RSBT

## A complete range of solutions to suit your needs


### RSBD & RSBT (45 mm) - Three phase soft starters



- Patented auto-adaptive algorithm
- No user settings required
- 2-phase (RSBD) and 3-phase (RSBT) controlled solutions
- Internally bypassed for less heat dissipation
- Class B (residential) performance for EMC\*
- HP algorithm for multi-compressor systems
- Compact dimensions
- Integrated diagnostic functions
  - Phase Sequence, Under-voltage, Locked-rotor
- Connection to plug-in additional modules
  - RFPM\* - 1 relay output module
  - RFILT - EMC filter module
  - RSPM\* - 1 O.C., 1 relay output module
- Operational current: Up to 45 AAC (RSBD), 32 AAC (RSBT)

\* Applies for RSBT models only

### RSBS Single phase soft starters



- No user settings required
- HP algorithm for high pressure starts
- Current limiting strategy
- Optional relay output for alarm indication
- User-friendly alarm indication
- Integrated start capacitor
- Integrated diagnostic functions
- Class B (residential) performance for EMC
- Operational current: Up to 32 AAC

### RSBD & RSBT (120mm) Three phase soft starters



- Patented auto-adaptive algorithm
- 2-phase (RSBD) and 3-phase (RSBT) controlled solutions
- Internally bypassed for less heat dissipation
- No user settings required
- HP algorithm for high pressure starts
- Relay indication for alarms and top of ramp
- User-friendly alarm indication
- Integrated diagnostic functions
- Operational current: Up to 95 AAC
- RS485 Serial Communication (MODBUS RTU) optional



# RSBS, RSBD & RSBT

## Scroll compressor soft starter series

RSBS is a single-phase soft starter that reduces compressor starting currents and hence limits the peak energy demand. RSBS provides a one-package solution for compressor softstarting and starting capacitor control. Driven by local utility regulations, single phase heat pumps need to respect specific current limits during start so as not to disturb the electrical network and/or neighboring equipment.

RSBS has a dedicated algorithm and inbuilt current limit settings specifically for scroll compressor starting. To limit the peak energy demand resulting in expensive utility contracts by the end-users.


RSBS complies with Class B (residential) limits for conducted and radiated emissions which ensures that neighbouring equipment is not negatively affected by any interference generated by the softstarter switching.



RSBS HP provides a dynamic current limit that ensures compressor starting even at higher starting pressures with a maximum current limit of 80 AACrms.

### Long term reliability through dedicated algorithm

By limiting the starting current to specified limits, RSBS not only eliminates the annoying issue of light flickering but most importantly it increases the compressor's lifetime by reducing the mechanical stresses resulting from high starting current.

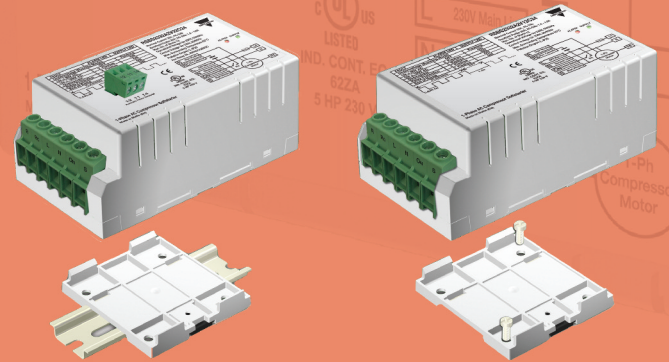

## RSBS compact single phase compressor soft starter

### More protection

RSBS has a number of built-in diagnostic functions to highlight abnormal conditions which could damage the compressor.

RSBS alarms include:

- Under-voltage protection (in bypass mode)
- Locked rotor protection
- Ramp-up time > 1second
- Welded relay protection
- Over-current in bypass mode

### Easy to fit

- Compact dimensions
- DIN or panel mounting
- Integrated starting capacitor
- Internally supplied

### RSBS technical specifications

<b>Housing (H x W x D)</b>	60.4 x 76 x 137.2 mm
<b>Number of starts per hour @ 40°C</b>	12 (for RSBS23..A2V.2C24) 10 (for RSBS23..A2V.2C24HP)
<b>Operational voltage</b>	230 VAC ± 15%
<b>Operational frequency</b>	50/60 Hz ± 5Hz
<b>Rated operational current</b>	25/32 AAC
<b>Internally bypassed</b>	Yes
<b>Integrated starting capacitor</b>	Yes
<b>Approvals</b>	CE, UL, cUL, EN 60335-2-40
<b>Protection degree</b>	IP20
<b>Integrated protection against short cycling</b>	Yes



## Benefits for your HVAC Systems

It is estimated that around 40% of electrical energy is consumed in buildings mainly for heating, ventilation and air-conditioning systems. Initiatives aimed at reducing CO<sub>2</sub> emissions by using more efficient and renewable energy systems are contributing to innovative designs for more energy-saving products and technologies both in the residential and the industrial sectors.

Carlo Gavazzi offers a comprehensive range of softstarting solutions specifically designed for scroll compressor applications so as to reduce such negative effects whilst prolonging the system lifetime.

### Heat pumps

#### Benefits of Carlo Gavazzi scroll compressor soft starters:

- Patented algorithm optimised for scroll compressors
- No external settings required
- Unmatched inrush current reduction
- Compact design
- Compliance to residential (Class B) EMC requirements for RSBS and RSBT series (up to 15 kW)



### Chillers

#### Benefits of Carlo Gavazzi scroll compressor soft starters:

- Typical inrush current reduction vs direct on line >50%
- Reduction in system vibrations
- Longer compressor lifetime
- Tamper proof design with no external settings
- Optimised control through serial communication on RSB...CVC series



### Roof tops

#### Benefits of RSBD and RSBT soft starters:

- Auto-adaptive algorithm ensures that starting parameters are automatically adjusted to optimize inrush current reduction
- Integrated diagnostic functions for increased system protection and reduced downtime
- Operating temperature range: -20°C to +60°C (-4°F to +140°F)
- Optimised algorithm for multi-compressor systems



# RSBD & RSBT

## Scroll compressor soft starter series

### Dedicated Soft Starting Solutions for 3 Phase Scroll Compressors

The RSBD and RSBT range of three phase soft starters is specifically designed and optimized for three phase scroll compressors incorporating a patented, auto-adaptive algorithm that continuously measures system parameters to optimize the starting performance of the scroll compressor.

RSBD and RSBT compact series is fitted in a "contactor-like" housing of just 45 mm width to facilitate installation and replacement of existing components.


Panel space saving is also enhanced through the incorporation of a number of diagnostic functions designed to protect your system in abnormal conditions.

### Patented Auto-Adaptive function to reduce starting current

Through the auto-adaptive function, the RSBD and RSBT achieve a considerable inrush current reduction without the need to adjust any settings. During every start the algorithm

measures relevant data and modifies the starting parameters to ensure a consistent inrush current reduction.


#### RSBD & RSBT Inrush Current Reduction

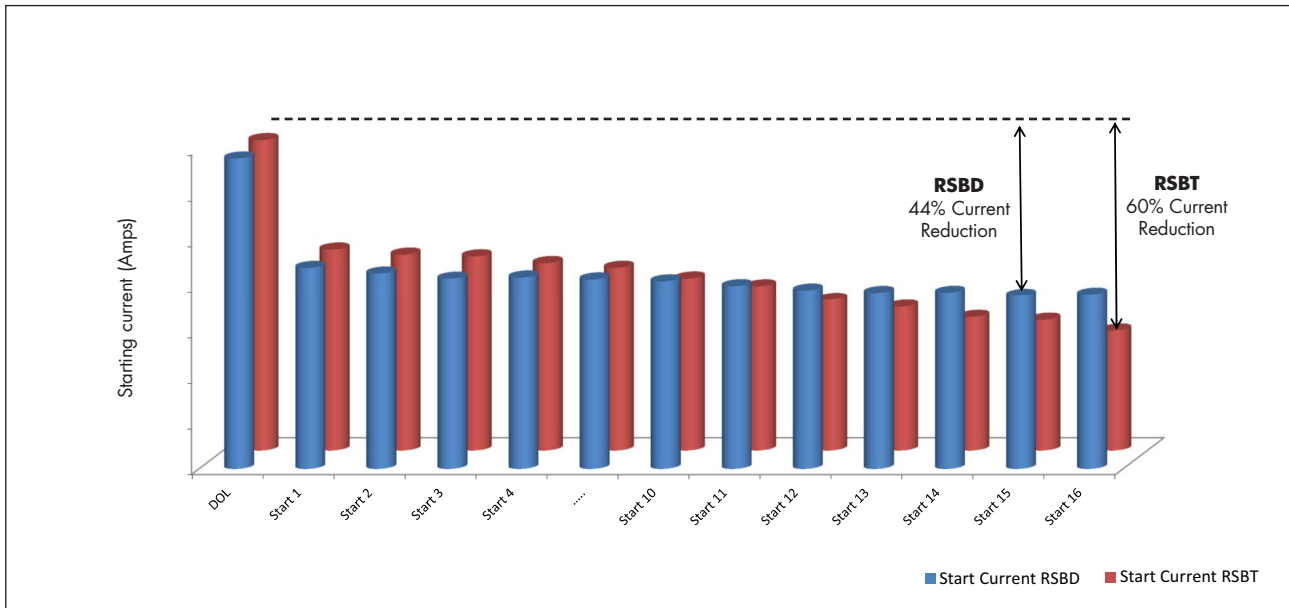




### A dedicated algorithm for Multi-compressor systems

As a further enhancement to the auto-adaptive algorithm, the RSBD and RSBT family includes a specific algorithm (HP algorithm) which has been designed to detect a locked rotor condition and automatically update the starting parameters to ensure that the compressor is soft-started within 1 second.

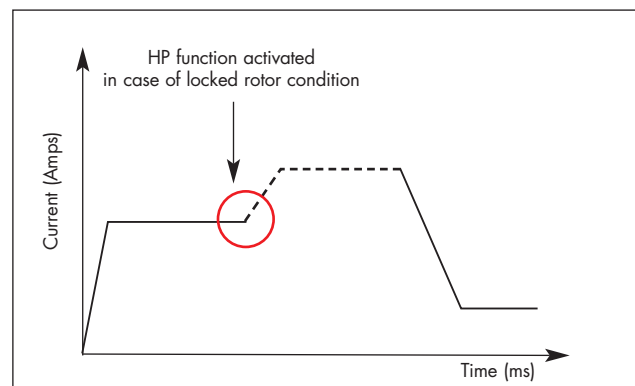This feature is particularly suited for multi-compressor systems where starting pressures can vary considerably from start to start thus requiring a different level of starting current. With the HP algorithm, the RSBD and RSBT soft starters automatically adjust the current limit level, upon detection of locked rotor condition, ensuring the system is not stopped unnecessarily.



## Main Specifications

Types	RSBD Compact	RSBT Compact	RSBD 120 mm	RSBT 120 mm
				
Housing (H x W x D)	125 x 45 x 105mm	125 x 45 x 81mm	170 x 120 x 150mm	170 x 120 x 150mm
Number of starts per hour @40°C	12	12	12	12
Operational Voltage	220- 400 VAC	220- 400 VAC	220- 480 VAC	220- 480 VAC
Operational Current	12/16/25/32/37/45 AAC	12/25/32 AAC	55/70/95 AAC	55/70/95 AAC
Control Voltage	24 VAC/DC or 110 - 400 VAC	110 - 400 VAC	24 VAC/DC or 110 - 400 VAC	24 VAC/DC or 110 - 400 VAC
Controlled Phases	2	3	2	3
Internally Bypassed	Yes	Yes	Yes	Yes
Approvals	CE - cULus - CCC (pending)	CE - cULus - VDE	CE - cULus	CE - cULus
Protection Degree	IP20	IP20	IP20	IP20

## Selection Guide - RSBD (2-phase controlled)

Control Voltage	Version	Rated Operational Current					
		12 Arms	16 Arms	25 Arms	32 Arms	37 Arms	45 Arms
110 - 400 VAC	No relay output: V51HP	RSBD4012EV51HP RSBD4012EV61HP	RSBD4016EV51HP RSBD4016EV61HP	RSBD4025EV51HP RSBD4025EV61HP	RSBD4032EV51HP RSBD4032EV61HP	RSBD4037EV51HP RSBD4037EV61HP	RSBD4050EV51HP RSBD4050EV61HP
	2 relay output: V61HP	RSBD4012FV51HP RSBD4012FV61HP	RSBD4016FV51HP RSBD4016FV61HP	RSBD4025FV51HP RSBD4025FV61HP	RSBD4032FV51HP RSBD4032FV61HP	RSBD4037FV51HP RSBD4037FV61HP	RSBD4050FV51HP RSBD4050FV61HP

## Selection Guide - RSBT (3-phase controlled)

Operational Voltage	Approvals	Version	Rated Operational Current		
			16 Arms	25 Arms	32 Arms
220 VAC	CE	No relay output: V10/V10HP V11/V11HP	RSBT2216EV10/V10HP RSBT2216EV11/V11HP RSBT2216EV20/V20HP RSBT2216EV21/V21HP	RSBT2225EV10/V10HP RSBT2225EV11/V11HP RSBT2225EV20/V20HP RSBT2216EV21/V21HP	RSBT2232EV10/V10HP RSBT2232EV11/V11HP RSBT2232EV20/V20HP RSBT2232EV21/V21HP
		1 relay output: V20/V20HP V21/V21HP	RSBT4016EV10/V10HP RSBT4016EV11/V11HP RSBT4016EV20/V20HP RSBT4016EV21/V21HP	RSBT4025EV10/V10HP RSBT4025EV11/V11HP RSBT4025EV20/V20HP RSBT4025EV21/V21HP	RSBT4032EV10/V10HP RSBT4032EV11/V11HP RSBT4032EV20/V20HP RSBT4032EV21/V21HP
220 VAC	CE, cULus	No relay output: V50	RSBT2216EV50 RSBT2216EV51/V51HP RSBT2216EV60 RSBT2216EV61/V61HP	RSBT2225EV50 RSBT2225EV51/V51HP RSBT2225EV60 RSBT2225EV61/V61HP	RSBT2232EV50 RSBT2232EV51/V51HP RSBT2232EV60 RSBT2232EV61/V61HP
		1 relay output: V51/ V51HP V60 V61/ V61HP	RSBT4016EV50 RSBT4016EV51/V51HP RSBT4016EV60 RSBT4016EV61/V61HP	RSBT4025EV50 RSBT4025EV51/V51HP RSBT4025EV60 RSBT4025EV61/V61HP	RSBT4032EV50 RSBT4032EV51/V51HP RSBT4032EV60 RSBT4032EV61/V61HP

## Selection Guide - RSBD/T 120 mm

No. of Controlled Phases	Type	Operational Voltage	Control Voltage	Version	Rated Operational Current		
					55 AAC	70 AAC	95 AAC
2	RSBD	220 - 480 VAC	24 VAC/DC & 110 - 400 VAC	2 changeover relay outputs	RSBD4855CV0	RSBD4870CV0	RSBD4895CV0
					RSBT4855CV0	RSBT4870CV0	RSBT4895CV0
3	RSBT			RS485 Serial Communication	RSBD4855CVC	RSBD4870CVC	RSBD4895CVC
					RSBT4855CVC	RSBT4870CVC	RSBT4895CVC

## OUR SALES NETWORK IN EUROPE

**AUSTRIA** - Carlo Gavazzi GmbH  
Ketzergrasse 374, A-1230 Wien  
Tel: +43 1 888 4112  
Fax: +43 1 889 10 53  
office@carlogavazzi.at

**BELGIUM** - Carlo Gavazzi NV/SA  
Mechelsesteenweg 311, B-1800 Vilvoorde  
Tel: +32 2 257 4120  
Fax: +32 2 257 41 25  
sales@carlogavazzi.be

**DENMARK** - Carlo Gavazzi Handel A/S  
Over Hadstenvej 40, DK-8370 Hadsten  
Tel: +45 89 60 6100  
Fax: +45 86 98 15 30  
handel@gavazzi.dk

**FINLAND** - Carlo Gavazzi OY AB  
Petaksentie 2-4, FI-00661 Helsinki  
Tel: +358 9 756 2000  
Fax: +358 9 756 20010  
myynti@gavazzi.fi

**FRANCE** - Carlo Gavazzi Sarl  
Zac de Paris Nord II, 69, rue de la Belle  
Etoile, F-95956 Roissy CDG Cedex  
Tel: +33 1 49 38 98 60  
Fax: +33 1 48 63 27 43  
french.team@carlogavazzi.fr

**GERMANY** - Carlo Gavazzi GmbH  
Pfnorstr. 10-14  
D-64293 Darmstadt  
Tel: +49 6151 81000  
Fax: +49 6151 81 00 40  
info@gavazzi.de

**GREAT BRITAIN** - Carlo Gavazzi UK Ltd  
7 Springlakes Industrial Estate,  
Deadbrook Lane, Hants GU12 4UH,  
GB-Aldershot  
Tel: +44 1 252 339600  
Fax: +44 1 252 326 799  
sales@carlogavazzi.co.uk

**ITALY** - Carlo Gavazzi SpA  
Via Milano 13, I-20020 Lainate  
Tel: +39 02 931 761  
Fax: +39 02 931 763 01  
info@gavazziacbu.it

**NETHERLANDS** - Carlo Gavazzi BV  
Wijkermeerweg 23,  
NL-1948 NT Beverwijk  
Tel: +31 251 22 9345  
Fax: +31 251 22 60 55  
info@carlogavazzi.nl

**NORWAY** - Carlo Gavazzi AS  
Melkeveien 13, N-3919 Porsgrunn  
Tel: +47 35 93 0800  
Fax: +47 35 93 08 01  
post@gavazzi.no

**PORTUGAL** - Carlo Gavazzi Lda  
Rua dos Jerónimos 38-B,  
P-1400-212 Lisboa  
Tel: +351 21 361 7060  
Fax: +351 21 362 13 73  
carlogavazzi@carlogavazzi.pt

**SPAIN** - Carlo Gavazzi SA  
Avda. Iparraguirre, 80-82,  
E-48940 Leioa (Bizkaia)  
Tel: +34 94 480 4037  
Fax: +34 94 480 10 61  
gavazzi@gavazzi.es

**SWEDEN** - Carlo Gavazzi AB  
V:a Kyrkogatan 1,  
S-652 24 Karlstad  
Tel: +46 54 85 1125  
Fax: +46 54 85 11 77  
info@carlogavazzi.se

**SWITZERLAND** - Carlo Gavazzi AG  
Verkauf Schweiz/Vente Suisse  
Sumpfstrasse 3,  
CH-6312 Steinhausen  
Tel: +41 41 747 4535  
Fax: +41 41 740 45 40  
info@carlogavazzi.ch

## OUR SALES NETWORK IN THE AMERICAS

**USA** - Carlo Gavazzi Inc.  
750 Hastings Lane,  
Buffalo Grove, IL 60089, USA  
Tel: +1 847 465 6100  
Fax: +1 847 465 7373  
sales@carlogavazzi.com

**CANADA** - Carlo Gavazzi Inc.  
2660 Meadowvale Boulevard,  
Mississauga, ON L5N 6M6, Canada  
Tel: +1 905 542 0979  
Fax: +1 905 542 22 48  
gavazzi@carlogavazzi.com

**MEXICO** - Carlo Gavazzi Mexico S.A. de C.V.  
Calle La Montaña no. 28, Fracc. Los Pastores  
Naucalpan de Juárez, EDOMEX CP 53340  
Tel & Fax: +52.55.5373.7042  
mexicosales@carlogavazzi.com

**BRAZIL** - Carlo Gavazzi Automação Ltda.  
Avenida Brig. Luís Antônio, 3067  
B. J. Paulista CEP 01401-000 São Paulo  
Tel: +55 11 3052 0832  
Fax: +55 11 3057 1753  
info@carlogavazzi.com.br

## OUR SALES NETWORK IN ASIA AND PACIFIC

**SINGAPORE** - Carlo Gavazzi Automation  
Singapore Pte. Ltd.  
61 Tai Seng Avenue  
#05-06 UE Print Media Hub  
Singapore 534167  
Tel: +65 67 466 990  
Fax: +65 67 461 980  
info@carlogavazzi.com.sg

**MALAYSIA** - Carlo Gavazzi Automation  
(M) SDN. BHD.  
D12-06-G, Block D12,  
Pusat Perdagangan Dana 1,  
Jalan PJU 1A/46, 47301 Petaling Jaya,  
Selangor, Malaysia.  
Tel: +60 3 7842 7299  
Fax: +60 3 7842 7399  
sales@gavazzi-asia.com

**CHINA** - Carlo Gavazzi Automation  
(China) Co. Ltd.  
Unit 2308, 23/F.,  
News Building, Block 1, 1002  
Middle Shennan Zhong Road,  
Shenzhen, China  
Tel: +86 755 83699500  
Fax: +86 755 83699300  
sales@carlogavazzi.cn

**HONG KONG** - Carlo Gavazzi  
Automation Hong Kong Ltd.  
Unit 3 12/F Crown Industrial Bldg.,  
106 How Ming St., Kwun Tong,  
Kowloon, Hong Kong  
Tel: +852 23041228  
Fax: +852 23443689

## OUR COMPETENCE CENTRES AND PRODUCTION SITES

Carlo Gavazzi Industri A/S  
Hadsten - **DENMARK**

Carlo Gavazzi Ltd  
Zejtun - **MALTA**

Carlo Gavazzi Controls SpA  
Belluno - **ITALY**

Uab Carlo Gavazzi Industri Kaunas  
Kaunas - **LITHUANIA**

Carlo Gavazzi Automation  
(Kunshan) Co., Ltd.  
Kunshan - **CHINA**

## HEADQUARTERS

Carlo Gavazzi Automation SpA  
Via Milano, 13 - I-20020  
Lainate (MI) - **ITALY**  
Tel: +39 02 931 761  
info@gavazziautomation.com



**CARLO GAVAZZI**  
Automation Components

*Energy to Components!*

www.gavazziautomation.com

