
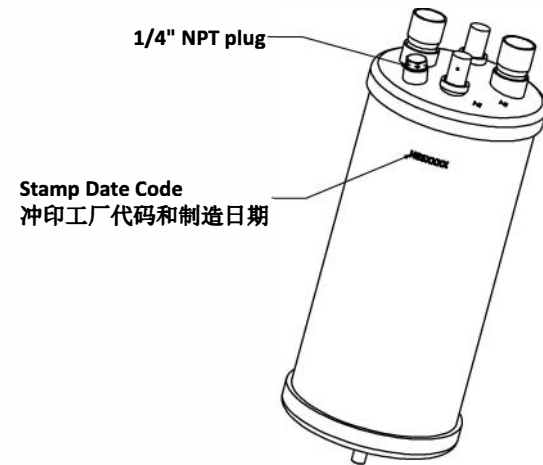
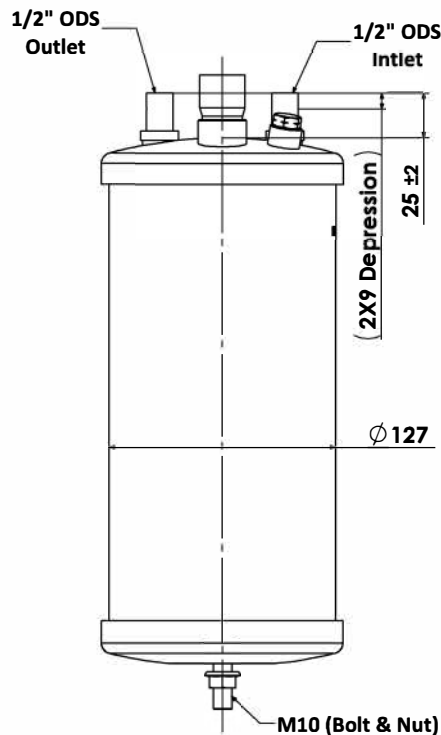
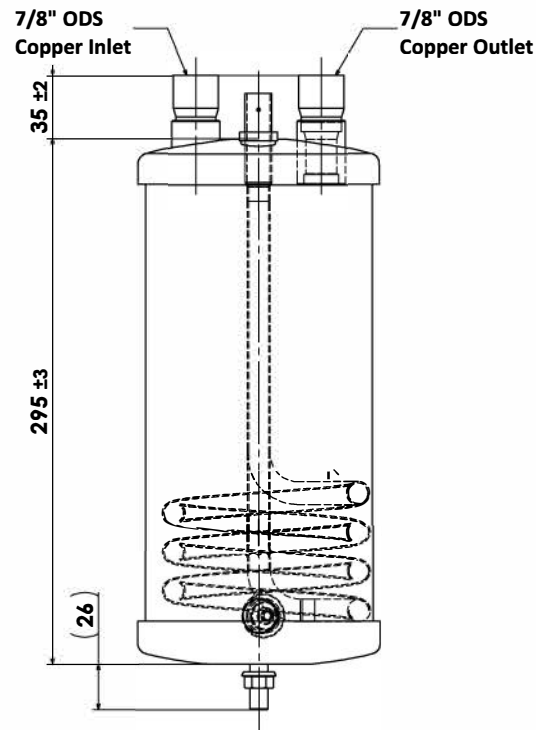


HGI Part No.	03/03/2025 JTP  APPROVED DOCUMENT	☒ PED 2014/68/EU ☒ AS2971.2 ☒ UL207						REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
S-7057HE-customer		☐ CAT I ☒ CAT II						B	ECN-HT21008	Design change	Angel Zhang	2021/3/31
		Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa	C	ECN-HT25002	Design temperature updated from -30℃~50℃ to -30℃~80℃	Qiu Leixin	2025/02/19
		3.2	Ø121	3.1	3.1	4.43	15.5					

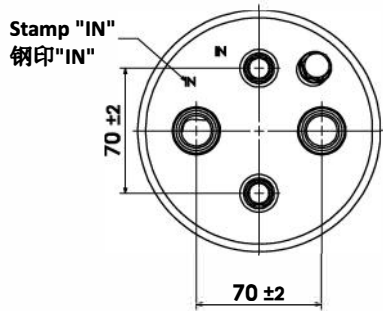

Technical Requirements:
技术要求

- Allowable operating temperature -30°C to +80°C; 工作温度-30°C到+80°C;
- Powder coating: Henry Blue RAL 5013. 喷涂颜色: 亨利蓝RAL 5013.

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Ra 1.6	Estimated Weight 预估重量	N/A	Approved by 批准	Julian Parker	2025/2/19		HENRY
	±1.0	±0.2	±0.05		±2°	±0.5°		Scale 比例	1:3	Checked by 审核	Leo Wu	2025/2/19		
Tolerance Unless Stated Otherwise 未注尺寸公差								Unit 绘图单位	mm					