



CAREL

Cella Range

Solutions for cold rooms

Connected Efficiency

Cella Range - platform for cold room solutions

A wide range of integrated and inter-communicating controllers and accessories that maximise system efficiency and energy saving and preserve the value of the goods stored, with special focus on simple installation and configuration and user convenience.

- Complete control of all cold room devices;
- Complies with HACCP standards;
- Temperature/humidity management;
- Management of electronic expansion valves;
- Integration with DC inverter solutions;
- All-in-one or remote power management (serial);
- Integrated safety devices and advanced supervision.

*CellaRange

A range of modular products for complete management of cold rooms, which can be combined so as to best adapt to system specifications, are easily expandable and can also be integrated into retrofit applications.



1ph/3ph power modules

Power modules for managing single-phase and/or three-phase loads; modular and/or remote connection (RS485).



EVD modules

EVD modules for electronic valve management; modular and/or remote connection (RS485).



Usability

Faster installation and commissioning thanks to error-proof wiring, device pre-configuration and integration with advanced interfaces (multilingual graphics and text).



Efficiency

Up to 30% energy savings compared to traditional systems by using the electronic stepper valve. Further advantages in combination with condensing units based on CAREL DC inverter technology.




Product quality

Minimum variation in product storage temperature and total control of humidification in the cold room, with safety guaranteed by the CAREL supervision platform.



Electronic stepper expansion valves, in inspectable or welded versions, available for different types of applications or refrigerants, including CO₂

up
30%
energy saving

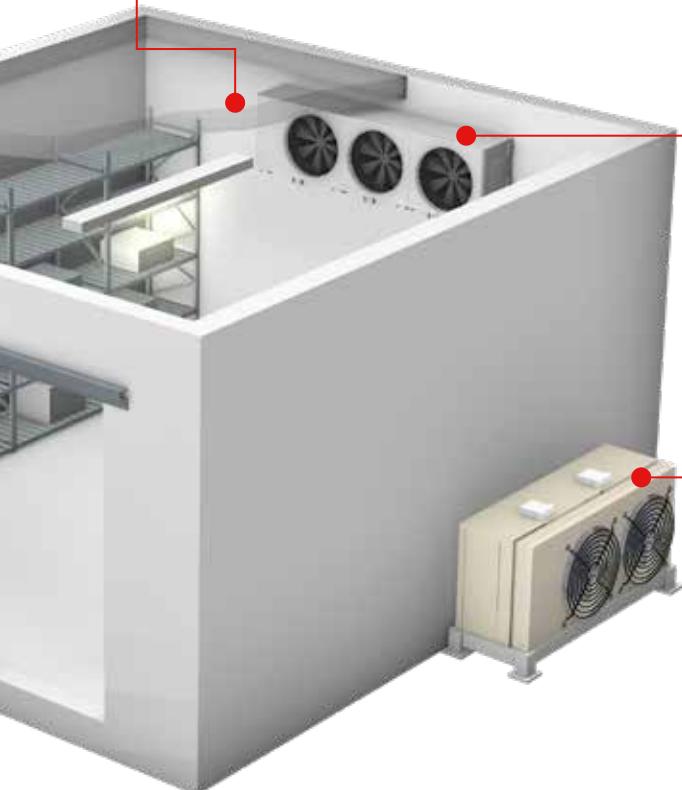

evidice

Invented for cold environments

Ready-to-install solution: evaporator complete with electronic expansion valve and driver, pre-assembled, wired and tested by the manufacturer.

* Ask your dealer for evaporators with embedded CAREL technology



H-ECU*

The real capacity modulation technology for condensing units

Solution for variable-speed condensing units, based on DC inverter technology for applications with HFCs, HFOs and natural refrigerants (CO₂).

* Ask your dealer for condensing units with embedded CAREL technology

•BOSS mini

Mobile-ready local supervisor with built-in WiFi

Intuitive and customisable interface, fully compatible with mobile devices. New alarm notification channels via instant messaging.



Probes and sensors



Wide range of temperature and humidity probes and pressure transducers to manage different types of applications.

Accessories



ColdWatch
Trapped personnel alarm.



Leakage sensor
Refrigerant gas leakage sensor.



humiDisk
Cold room humidity management.

High-efficiency integrated systems

Electronic valve driver mounted on the evaporator

eVDice





EEV and drivers already fitted on the evaporator and tested.



Simple and fast configuration, even via remote (RS485).



Cold room operating in half the time.

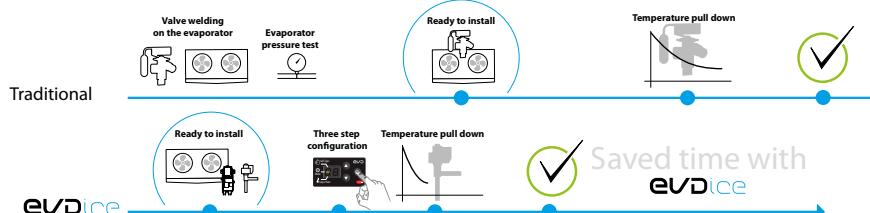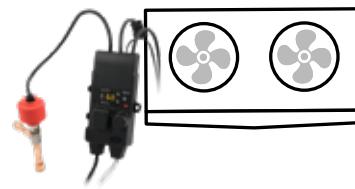

Estimated savings in installation time and configuration of an evaporator with EVD Ice compared to traditional technology.

Technology for the management of electronic expansion valves

exVsistema




High efficiency and energy savings.



Reduced configuration, commissioning and maintenance times.



Suitable for more than 40 types of refrigerant.

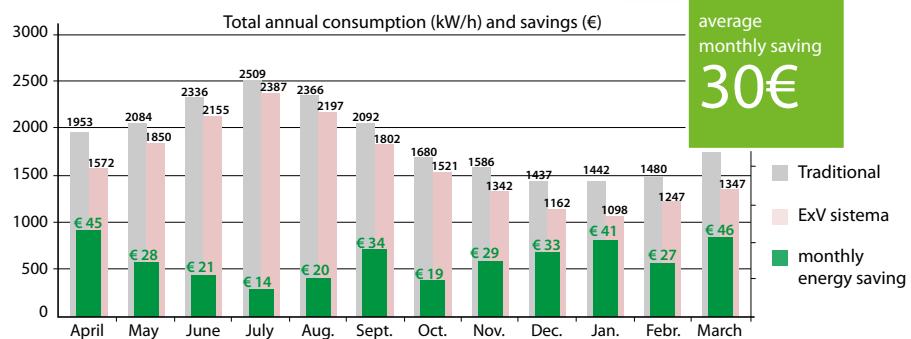

Total annual energy consumption based on a 90m³ LT cold room, comparison between EEV and TEV technology (energy savings valued @ 0.12 €/kW/h).

For more information, see Marketing News [+4000057EN](#) on [www.carel.com](#).

Modules for direct and remote management of three-phase loads

Cella 3PH SOLUTION



Range of modules for the management of three-phase compressors, defrosts and fans, ready to install.



Reduced installation times and costs



Example of installation of a remote power module compared to a traditional three-phase solution. In a cold room measuring 2.5 m x 5 m x 16 m, the CAREL solution can save up to 34 metres of power cable (and consequent installation time and costs), exploiting the connection via simple RS485 signal cable between UltraCella and the three-phase power module.

Capacity modulation technology for condensing units

HEcu




High efficiency and energy savings.



Maximum reliability also ensured by compressor envelope and oil return management.



Preservation of stored product quality and value.

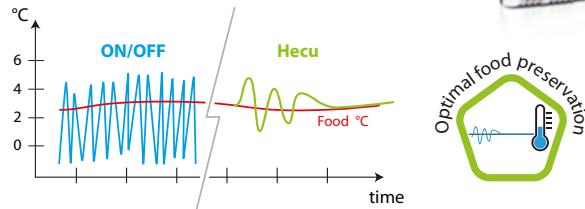

Comparison between the storage temperature in a traditional system based on ON/OFF compressor management and a modulating system based on HEcu DC inverter technology.
In the latter case, the cold room temperature remains within a range of $\pm 1^{\circ}\text{C}$ around the set point for over 80% of the total time (including defrosting).





DC Cella SPLIT

Cold room reinvented, out of the box







Cold room timeline: from installation to steady operating conditions

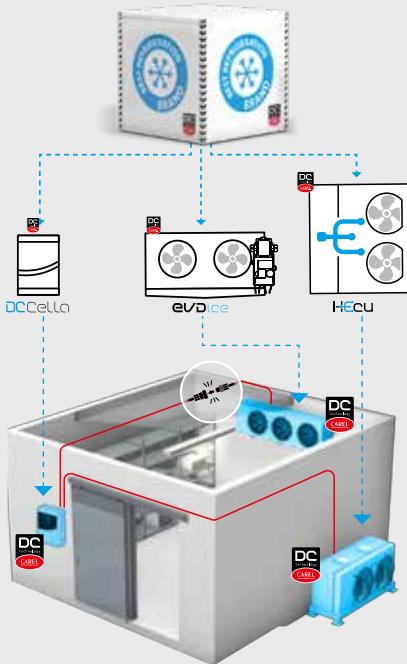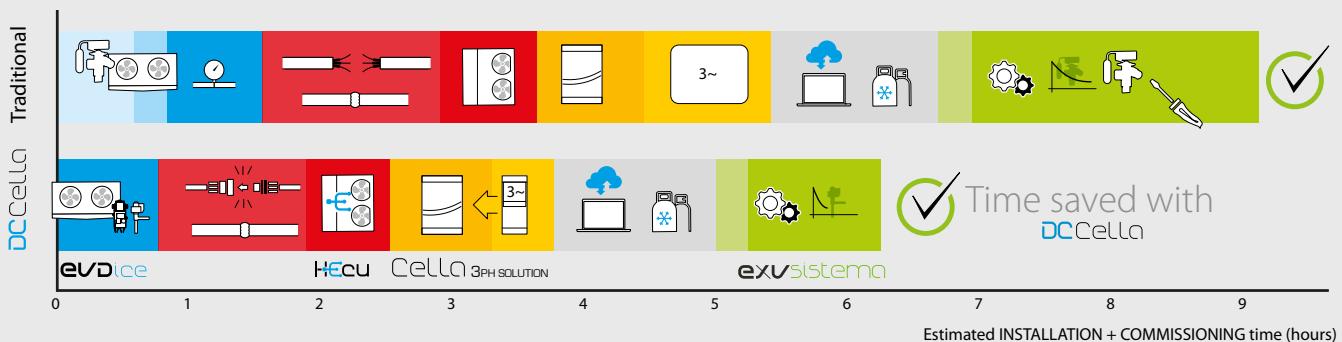

DC Cella SPLIT is the new solution for high performance cold rooms. Based on the experience acquired from innovative products such as Hecu, eVD ice and UltraCella, DC Cella SPLIT combines the high performance of DC inverter applications and CO₂ technology with the installation simplicity of a home air-conditioner.

An integrated system with real-time management of evaporators and condensing units, with the same easy installation and use as a traditional product.



* depending on insulation

* Ask your dealer for cold room solutions with CAREL technology

Part number guide

Type of compressor	Management of evaporator loads	Cold room controller		Advanced functions	Application diagram (on next page)	Main controller		
		Relays	Protection functions			Cold room controller	Service display (opt.)	Control/defrost probes
	 	1	-		1	WE00S***00 SmartCella	-	NTC0*****
		3	-		5	MD33A***00 MasterCella	-	NTC0***** (2x)
		4	-		1	WE00C***00 SmartCella	-	NTC0***** (2x)
					2	WE00C***00 SmartCella	-	NTC0***** (2x)
		5	-		5	MD33D***00 MasterCella	-	NTC0***** (2x)
		6	-	   	3/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)
				   	4/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)
	 	4			6	WE00C***00 SmartCella	-	NTC0***** (2x)
		6		   	8/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)
		4	   		7	WE00C***00 SmartCella	-	NTC0***** (2x)
		6	    	   	9/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)
			    	    	10/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)
	 	5	    	 	11	WP00E***U0 SmartCella 3PH EVD	-	NTC0***** (2x)
			 		12	WP00E***00 SmartCella 3PH	-	NTC0***** (2x)
	 	6	    	     	13/14	WB000**0FO UltraCella	PGDEWB0FZK	NTC0***** (2x)

Key

 single-phase compressor or solenoid valve/condensing unit enabling signal

 single-phase evaporator fans

 defrost + fan four-pole circuit breaker

 three-phase compressor

 three-phase evaporator fans

 defrost four-pole circuit breaker

 single phase defrost

 residual-current circuit breaker

 Kriwan

 three-phase defrost

 controller protection fuse

 evaporator fan thermal protection

Load management	Electronic valve management				Accessories (optional)			
Power module	EVD module	Electronic valve	Valve probes	Humidity management	Connectivity card	Supervision	Safety	
			P SH T SH	H AMB Ambient	RS485			
-	WM00E*S*00 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30	BMEST0**** boss mini	CM0000**** Coldwatch	
-	WM00EUC000 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSEM30	BMESTPWA00 power supply	GDW****A00 refrigerant gas	
-	WM00E*S*00 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30			
WM00P000*N protection	WM00E*S*00 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30			
-	WM00EUC000 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSEM30			
-	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	DPPC***000 humidity probe	included			
WM00P000*N protection	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	UC0**0D*00 humiDisk				
WT00SD00N0 3ph direct	WM00E*S*00 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30			
WT00SD00N0 3ph direct	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	DPPC***000 humidity probe UC0**0D*00 humiDisk	included			
WT00CDG0N0 3ph direct	WM00E*S*00 EVDIS00**0	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30			
WT00CDG0N0 3ph direct	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	DPPC***000 humidity probe	included			
WT00E*00N0 3ph remote	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	UC0**0D*00 humiDisk				
included	included (add EVDIS00**0)	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	-	IROPZSER30			
included	-	-	-	-	IROPZSER30			
WT00F**0N0 3ph remote	WM00E*N*00 ⁽¹⁴⁾	E2V**Z**** E2VCABS*I0	NTC0**HF03; SPKT00*; SPKC00*	DPPC***000 humidity probe UC0**0D*00 humiDisk	included			

⁽¹⁴⁾: for cold rooms with two evaporators, two driver modules are required, including at least one WM00E*S*00 with EVDIS00**0 display + two electronic valves + two pressure transducers and cables + two temperature sensors.




defrost safety thermostat



energy saving



remote power management




high/low pressure switch



advanced energy saving



datalogger function (USB)




main disconnect switch



built-in serial connectivity



humidification/dehumidification management



adjustable manual motor starter
(compressor)




condenser fan management

1ph cold rooms


1 SmartCella + EVD module

(WE00C***00 + WM00E*S*00 + EVDIS00**0)

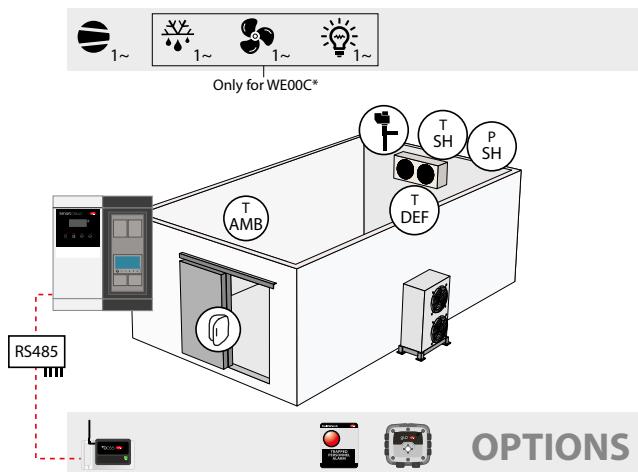


2 SmartCella + EVD module + 1ph power module

(WE00C***00 + WM00E*S*00 + EVDIS00**0 + WM00P000*N)

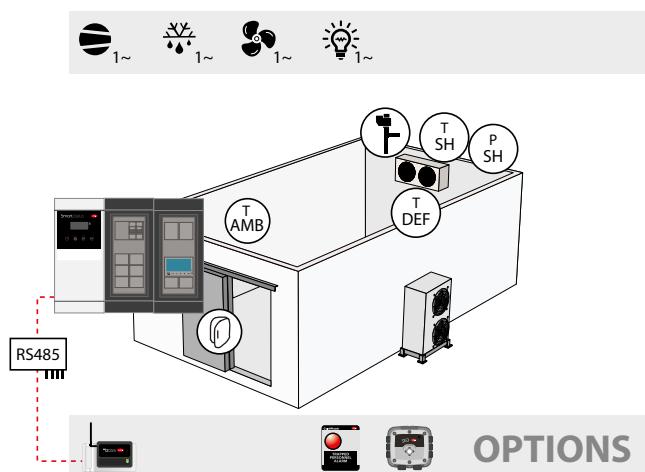


3 UltraCella + EVD Module

(WB000**0FO + WM00E*N*00)

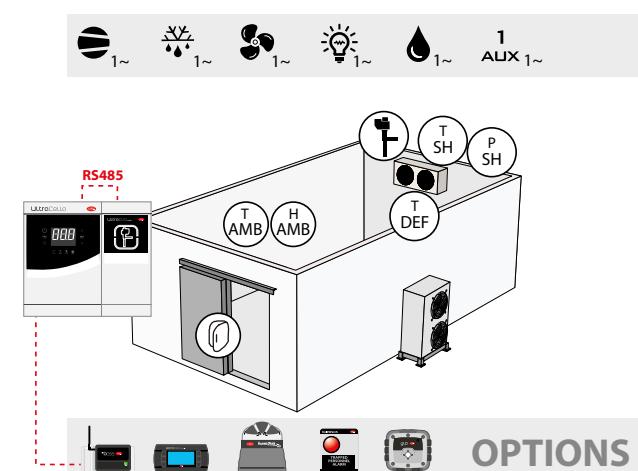


4 UltraCella + EVD module + 1ph power module

(WB000**0FO + WM00E*N*00 + WM00P000*N)

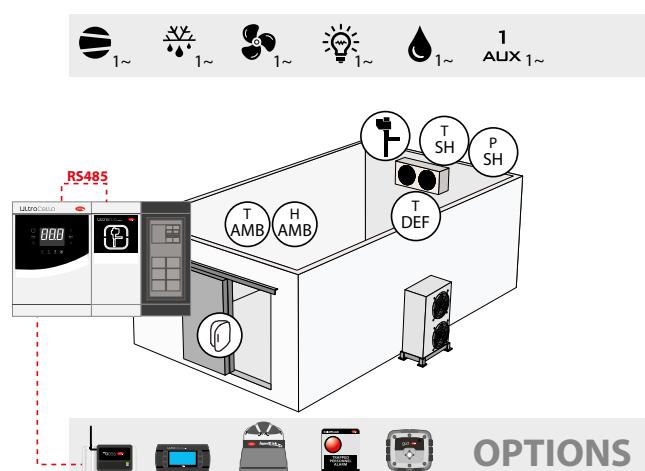

5 MasterCella + EVD Module

(MD33D***00 + WM00EUC000 + EVDIS00**0)


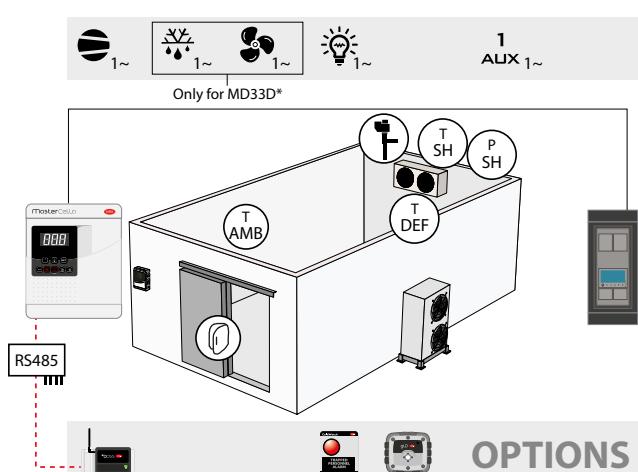


See diagram 14 for cold rooms with two evaporators.

1ph cold rooms with 3ph defrost and fans



6 SmartCella + EVD module + 3ph power module (defrost)

(WE00C***00* + WM00E*S*00+EVDIS00**0 + WT00SD00N0)

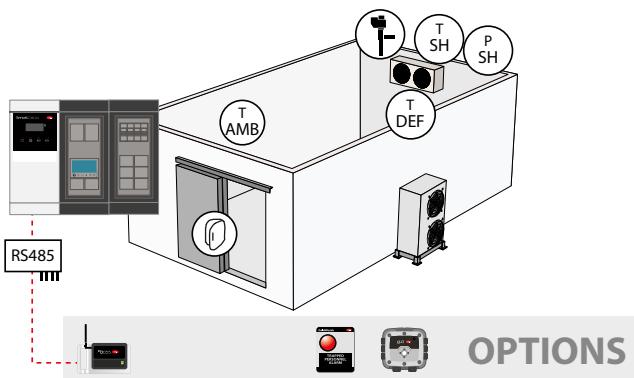



7 SmartCella + EVD module + 3ph power module (defrost + fans)

(WE00C***00 + WM00E*S*00+EVDIS00**0 +WT00CDG0N0)

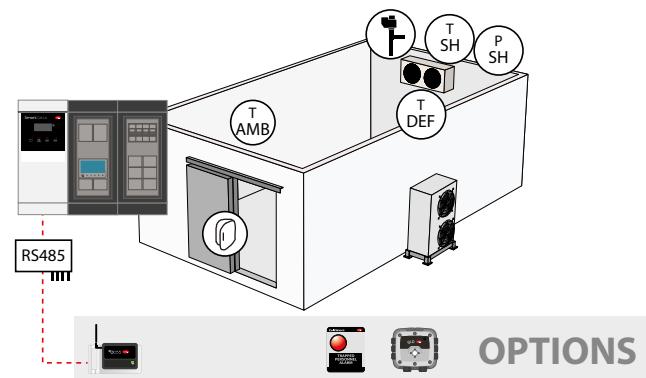



8 UltraCella + EVD module + 3ph power module (defrost)

(WB000**0FO + WM00E*N*00 + WT00SD00N0)

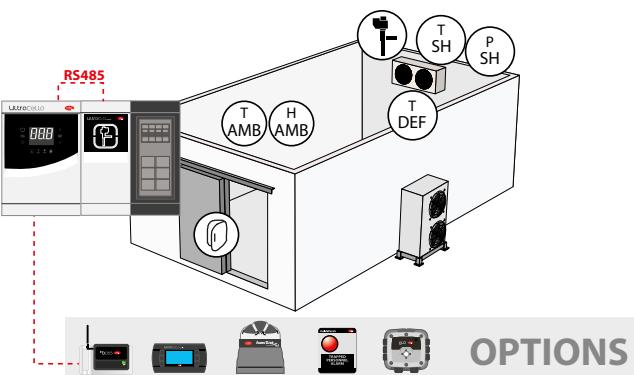


9 UltraCella + EVD module + 3ph power module (defrost + fans)

(WB000**0FO + WM00E*N*00 + WT00CDG0N0)

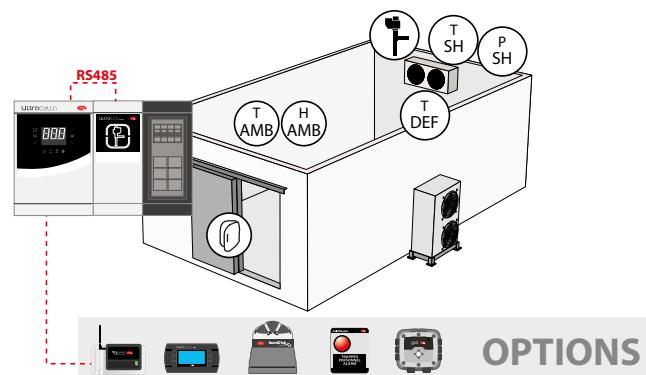

10 UltraCella + EVD module + Remote 3ph power module (evaporator)

(WB000**0FO + WM00E*N*00 + WT00E*00N0)

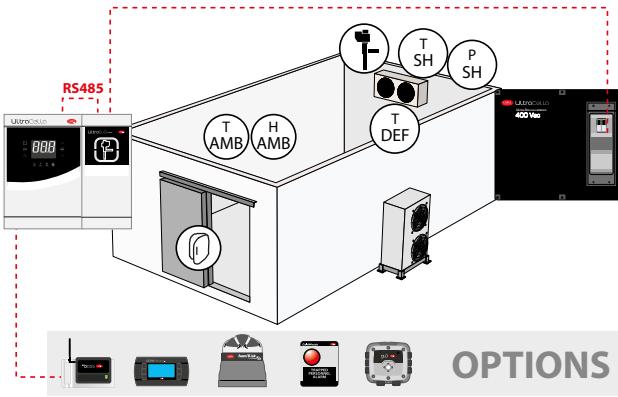


See diagram 14 for cold rooms with two evaporators.

3ph cold rooms


11 SmartCella 3PH EVD

(WP00E****U0 + EVDIS00**0)

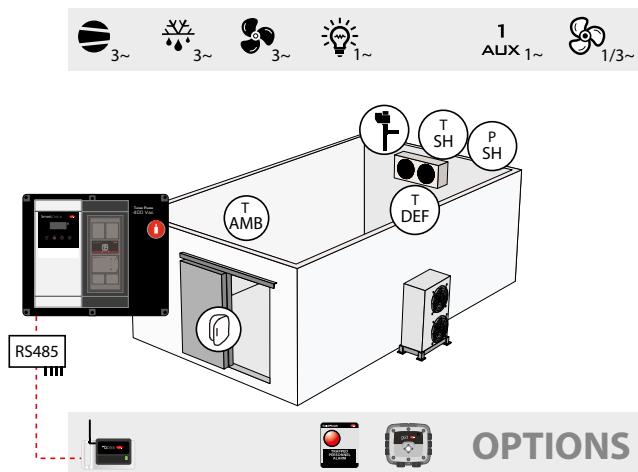


12 SmartCella 3PH

(WP00E****00)

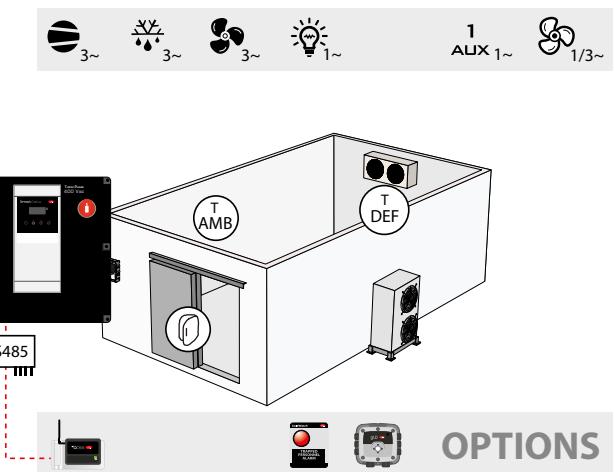

13 UltraCella + EVD module + Remote 3ph power module (full)

(WB000**0F0 + WM00E*N*00 + WT00F**ONO)

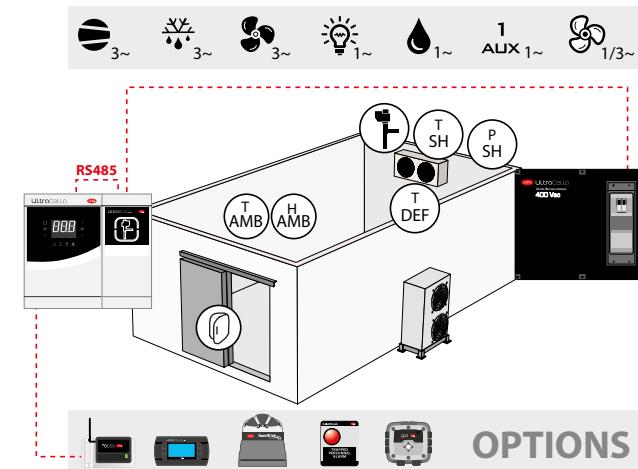


3ph cold rooms with two evaporators

14 UltraCella + 2 EVD modules + Remote 3ph power module (full)

(WB000**0F0 + WM00E***00 + WM00E*S*00 + EVDIS00**0 + WT00F**ONO)

(For cold rooms with two evaporators)

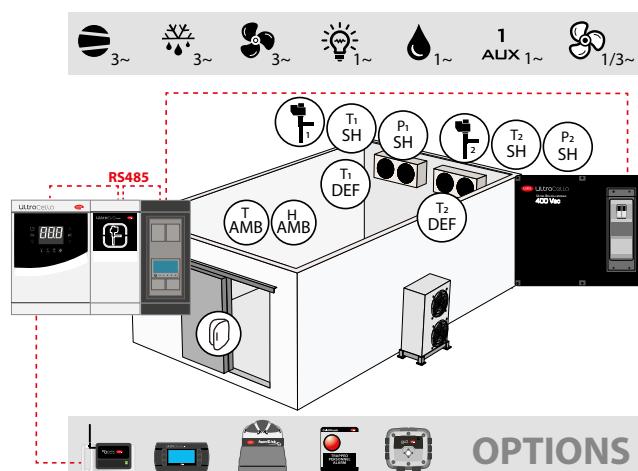

(14): for cold rooms with two evaporators, two driver modules are required, including at least one WM00E*S*00 with EVDIS00**0 display + two electronic valves + two pressure transducers and cables + two temperature sensors.

SmartCella



IP65 cold room front panel, available in version with 1 or 4 relays with power up to 2 HP. Defrost by compressor stop, heater or hot gas. Can be combined with EVD modules for electronic valve management and direct power modules for three-phase load management. Can be connected to supervision system via RS485 serial card.

Accessories

IROPZSER30: RS485 serial card for connection to supervision system.




Plus




Specifications	WE00S1EN00	WE00S1EN0A	WE00S1ET00	WE00C2HN00	WE00C2HN0A	WE00C2HT00	WE00C2HC00	WE00C2HM00	WE00C2HN0H	WE00C3HN00
Main	1 relay	1 relay with circuit breaker	1 relay with disconnect switch	4 relays	4 relays with circuit breaker	4 relays with disconnect switch	4 relays with RTC	4 relays with serial card included	4 relays, box for horizontal installation	4 relays with 3HP support relay
Dimensions	128x290x100 mm									
Ingress protection	IP65		IP54	IP65		IP54		IP65		
Power supply	230 Vac			115/230 Vac						
Power input	3 VA, 25 mA~ max			6 VA, 50 mA~ max						
Inputs										
Total	5									
Analogue (type)	2 (NTC/NTC*HT)									
Digital (type)	3 (configurable)									
Outputs (EN60730-1/UL873) - sum of load currents max. 12 A										
Compressor	16A (12(2)A/12A res. 5FLA 30LRA C300)			2HP (10(10)A/12A res. 12FLA 72LRA C300)						
Defrost	-	-	-	16A (12(2)A/12A res. 5FLA 30LRA C300)						
Evaporator fan	-	-	-	8A (8(4)A/8A res. 2FLA 12LRA C300)						
Light or AUX, configurable	-	-	-	8A (8(4)A/8A res. 2FLA 12LRA C300)						
Additional functions/modules										
Electronic valve management	Optional (with WM00E*S*00)									
Residual current circuit breaker	Optional (with WM00P000*N)	YES	Optional (with WM00P000*N)	YES	Optional (with WM00P000*N)					
Three-phase power management	Optional (direct with WT00S* or with WT00C*)									
Other specifications										
Connectivity (serial) RS485	Optional (with IROPZSER30)						YES	Optional (with IROPZSER30)		
Internal clock	-	-	-	-	-	-	YES	-	-	-
Main disconnect switch	-	-	YES	-	-	YES	-	-	-	-

Functional diagram

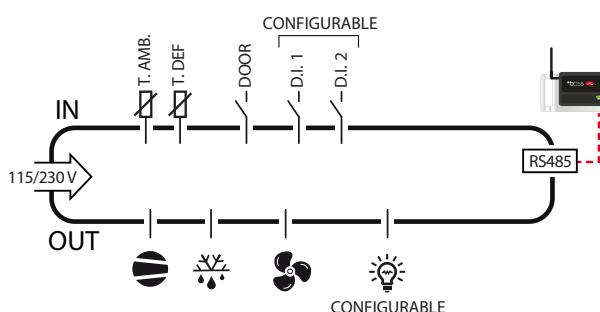

Product part number

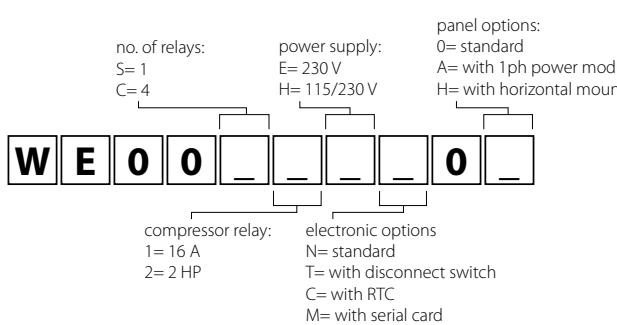

UltraCella

NEW Software release 3.x



IP65 cold room front panel, 6 relays with power up to 2 HP. Defrost by compressor stop, heater or hot gas. USB datalogging function. Humidification/dehumidification and dual evaporator management. Can be combined with two EVD modules for managing two electronic valves and direct or remote power modules for three-phase load management. Can be connected to supervision system via built-in RS485. Can interface with condensing units using CAREL DC INVERTER technology.

Accessories

PGDEWB0FZK:
UltraCella Service Terminal + cable



Plus



2x EEV
control




3PH
remote
management



LOG
datalogging
function

Specifications	WB000SG0FO	WB000SW0FO	WB000DG0FO	WB000DW0FO
Main	Single line display, Green LED	Single line display, White LED	Two line display, Green LED	Two line display, White LED
Dimensions	128x290x100 mm			
Ingress protection	IP65			
Power supply	230 Vac			
Power input	18 VA, 100 mA~ max			
Inputs				
Total	8			
Analogue (type)	3 (NTC, PT1000), 1 (NTC, 0-10 Vdc), 1 (0-5 Vdc, 4-20 mA)			
Digital (type)	3 (configurable)			
Outputs (EN60730-1/UL873) - sum of load currents max. 20 A				
Compressor	2HP (12(10 A)/12 A res. 12FLA 72LRA C300)			
Defrost	2HP (12(10 A)/12A res. 12FLA 72LRA C300)			
Evaporator fan	16A (10(5)/10 A res. 5FLA 18LRA C300)			
Light	16A (10(5)/10 A res. 5FLA 18LRA C300)			
AUX 1 (configurable)	8A (8(4) on NO, 6(4) on NC, 2(2) on NC and NO/8 A res. 2FLA 12LRA C300)			
AUX 2 (configurable)	8A (8(4) on NO, 6(4) on NC, 2(2) on NC and NO / 8 A res. 2FLA 12LRA C300)			
Analog output	0 to 10 Vdc, 10 mA max			
Additional functions/modules				
Electronic valve management	Optional (with WM00E*N*00 for one evaporator or WM00E*S*00 for two evaporators)			
Residual current circuit breaker	Optional (with WM00P000*N)			
Three-phase power management	Optional (remote with WT00E* or WT00F*, direct with WT00S* or WT00C*)			
Other specifications				
Connectivity (serial) RS485	YES (1 BMS, 1 FieldBus)			
Internal clock	YES			
Datalogger function	YES (USB)			
Humidity management	YES			

Functional diagram

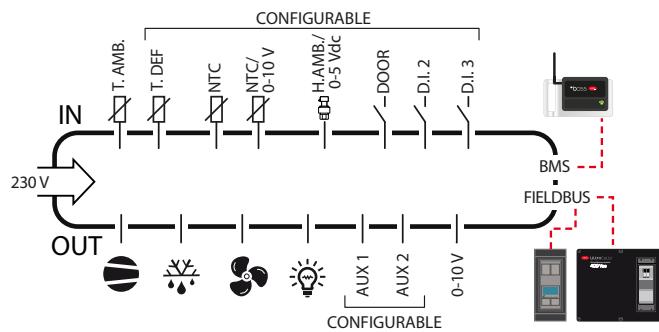

Product part number

W	B	0	0	0			0	F	0
---	---	---	---	---	--	--	---	---	---

display lines:
S= 1
D= 2

display colour:
W= white
G= green

MasterCella



IP65 cold room front panel, available in version with 3 or 5 relays with power up to 2 HP. Defrost by compressor stop, heater or hot gas. Can be combined with stand-alone EVD modules for electronic valve management. Can be connected to supervision system via RS485 serial card.

Accessories

IROPZSEM30: RS485 serial card for connection to supervision system



Plus




EEV
control




RS485
connectivity

Specifications	MD33A5ER00	MD33D0EN00	MD33D5EN00	MD33D5EB00	MD33D5FB00
Main	3 relays	5 relays (CMP 16 A)	5 relays (CMP 30 A)	5 relays (CMP 30 A) with RTC	5 relays (CMP 30 A) with RTC and disconnect switch
Dimensions	200x240x93 mm				
Ingress protection	IP65				IP54
Power supply	230 Vac				
Power input	11.3 VA, 50 mA~ max				
Inputs					
Total	5				
Analogue (type)	2 (NTC/NTC*HT)				
Digital (type)	3 (configurable)				
Outputs (EN60730-1/UL873) - sum of load currents max. 12 A					
Compressor	30 A (12(10 A)/12 A res. 2 HP 72LRA C300)	16 A (10(5)/10 A res. 5FLA 18LRA C300)	30 A (12(10A)/12 A res. 2HP 72LRA C300)		
Defrost	-	16 A (10(5)/10 A res. 5FLA 18LRA C300)			
Evaporator fan	-	8 A (8(4) on NO, 6(4) on NC, 2(2) on NC and NO/8 A res. 2FLA 12LRA C300)			
AUX 1 configurable	8 A (8(4) on NO, 6(4) on NC, 2(2) on NC and NO / 8 A res. 2FLA 12LRA C300)				
AUX 2 configurable	2HP (12(10 A)/12A res. 12FLA 72LRA C300)	16A (10(5)/10 A res. 5FLA 18LRA C300)	2HP (12(10 A)/12A res. 12FLA 72LRA C300)		
Additional functions/modules					
Electronic valve management	Optional, not modular (with WM00EUC000)				
Residual current circuit breaker	-				
Three-phase power management	-				
Other specifications					
Connectivity (serial) RS485	Optional (with IROPZSEM30)				
Internal clock	-	-	-	YES	YES
Infrared receiver	YES	-	-	YES	YES
Main disconnect switch	-	-	-	-	YES

Functional diagram

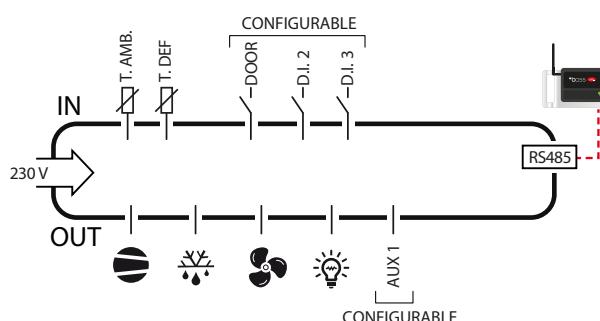

Product part number

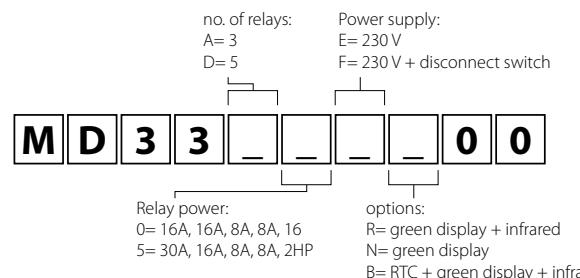

SmartCella three-phase



IP56 cold room front panel for three-phase applications, electronic, with 5 relays. Defrost by compressor stop, heater or hot gas. Available in the version with electronic valve driver included. Can be connected to supervision system via RS485 serial card.

Accessories

IROPZSER30: RS485 serial card for connection to supervision system.




Plus




Specifications	WP00E11A1*0	WP00E21A1*0	WP00E31A1*0	WP00E41A1*0	WP00E51A1*0	WP00E42A2*0	WP00E62A2*0	WP00E72A2*0	WP00E73B3*0						
Main	Three-phase up to 4 HP			Three-phase up to 7.5 HP			Three-phase up to 10 HP								
Electronic valve driver	Included in models with *=U (e.g. WP00E11A1U0); not included in models with *=0 (e.g. WP00E11A100)														
Dimensions	460x380x127 mm														
Ingress protection	IP56														
Power supply	400 Vac														
Protection functions															
Main disconnect switch	40 A														
Compressor (manual motor starter)	1.6 to 2.5 A	2.5 to 4 A	4 to 6.3 A	6.3 to 10 A	8 to 12 A	6.3 to 10 A	10 to 16 A	16 to 20 A	16 to 20 A						
Evaporator, condenser, defrost (circuit breaker)	10 A														
Auxiliary circuit (circuit breaker)	6 A														
Inputs															
Totals (electronic controller)	4														
Analogue (type)	2 (NTC/NTC*HT)														
Digital (type)	2 (configurable)														
Other inputs provided (contact)	Safety thermostat (defrost); thermal protection (evaporator fans); compressor Kriwan; high/low pressure switch, pump down														
Fan speed control pressure switch	-														
Outputs															
Compressor	1.6 to 2.5 A	2.5 to 4 A	4 to 6.3 A	6.3 to 10 A	8 to 12 A	6.3 to 10 A	10 to 16 A	16 to 20 A	16 to 20 A						
Defrost	9000 W - 3ph			9000 W - 3ph			12000 W - 3ph								
Evaporator fan	1000 W - 1ph / 1500 - 3ph			2000 W - 1ph / 3000 W - 3ph			3500 W - 3ph								
Condenser fan	900 W - 1ph			2000 W - 3ph			2000 W + 2000 W 3ph								
Light	800 W														
Other outputs	AUX configurable; solenoid valve output; compressor crankcase heater; power supply Kriwan														
Other specifications															
Connectivity (serial) RS485	Optional (with IROPZSER30 card)														

Functional diagram

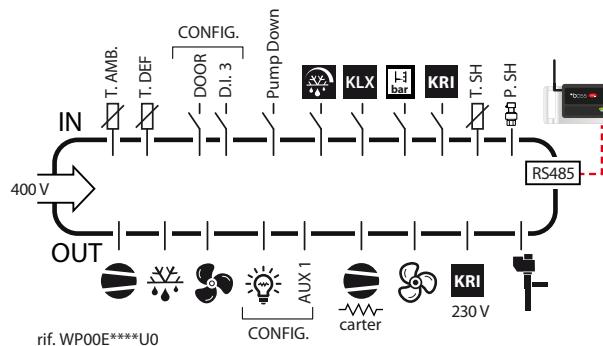

14

Product part number

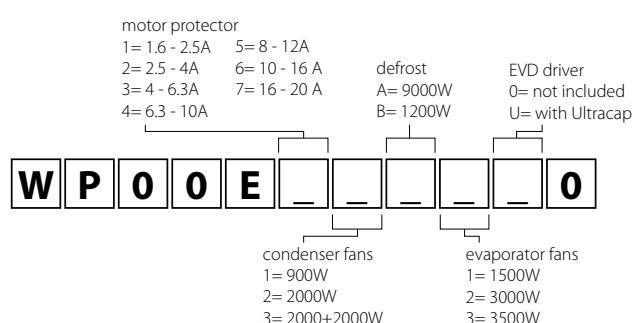

Driver modules



"blind" version

version with display


Control module for bipolar electronic valve, IP65, available in modular or stand-alone version, with and without connectable display. Optional Ultracap technology. Advanced two-way communication via RS485 (UltraCella) or one-way via control signal (SmartCella, MasterCella). Configurable auxiliary relay.

Accessories

EVDIS00IT0: display for EVD evolution in Italian. Also available in EN-English, FR-French, DE-German, ES-Spanish, RU-Russian, SE-Swedish, CN-Chinese and CZ-Czech.




Plus




configurable by UltraCella

Specifications		WM00ENS100	WM00ENS000	WM00ENI100	WM00EUS000	WM00EUUN00	WM00EUC000	WM00EUK000
Main		with display included (Italian/English)	connectable display (not included)	"blind" module	connectable display (not included), with Ultracap	"blind" module, with Ultracap	connectable display (not included) with Ultracap, stand-alone	"blind" module, with Ultracap, stand-alone
Compatibility		SmartCella, UltraCella	SmartCella, UltraCella	UltraCella	SmartCella, UltraCella	UltraCella	SmartCella, MasterCella, UltraCella	UltraCella
Dimensions		128x290x110 mm						
Ingress protection		IP65						
Power supply		230 Vac						
Ultracap (safety power supply)		-			YES			
Inputs								
Total		6						
Analogue (type)		4 (0-5 V; 4-20 mA; NTC; 0-10 V)						
Digital (type)		2						
Outputs								
Electronic valve		Bipolar						
Auxiliary relay		5(2) A @250 V						
Other specifications								
Connectivity (serial) RS485		YES						
Stand-alone installation (no side knock-outs)		-				YES		

Functional diagram

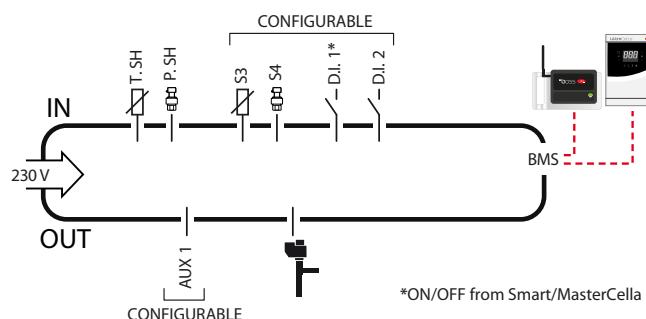

Product part number

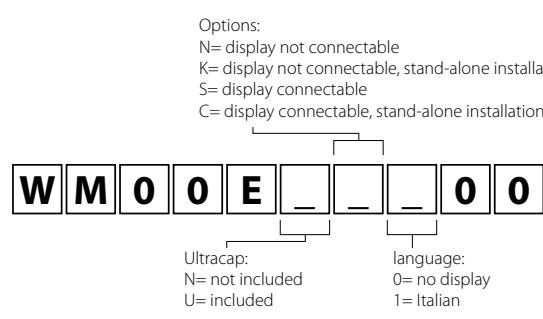

Electronic expansion valve



Complete range of bipolar electronic stepper valves for HFC, HFO, subcritical CO₂ (E²V-Z and E³V-S max 60 barg) and transcritical CO₂ (E²V-CW and E³V-CW max 140 barg). E²V-Z, E³V-S and E³V-CW versions with "smart" technology, which can be disassembled and inspected, with built-in removable filter, E²V-CW version in welded technology.

E²V-Z (PS 60 barg)

Specifications (mm)	E2V03ZSF03	E2V03ZSF13	E2V05ZSF03	E2V05ZSF13	E2V09ZSF03	E2V09ZSF13	E2V11ZSF03	E2V11ZSF13	E2V14ZSF03	E2V14ZSF13	E2V18ZSF03	E2V18ZSF13	E2V24ZSF03	E2V24ZSF13	E2V24ZSM03	E2V24ZSM13	E2V30ZSM03	E2V30ZSM13	E2V35ZSM03	E2V35ZSM13
Stator type	Bipolar, with IP67 superseal connector																			
Fittings (in/out)	12 - 12 mm ODF																16 mm (5/8" - 5/8" ODF)			
Size (mm)	03	05	09	11	14	18	24									24	30	35		
Sight glass	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	

Specifications (mm)	E2V03ZWFO3	E2V03ZWFI3	E2V05ZWFO3	E2V05ZWFI3	E2V09ZWFO3	E2V09ZWFI3	E2V11ZWFO3	E2V11ZWFI3	E2V14ZWFO3	E2V14ZWFI3	E2V18ZWFO3	E2V18ZWFI3	E2V24ZWFO3	E2V24ZWFI3	E2V24ZSM03	E2V24ZSM13	E2V30ZSM03	E2V30ZSM13	E2V35ZSM03	E2V35ZSM13
Stator type	Bipolar, with IP67 superseal connector																			
Fittings (in/out)	1/2" - 1/2" ODF																			
Size (mm)	03	05	09	11	14	18	24									24	30	35		
Sight glass	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	

E³V-S (PS 60 barg)

Specifications (mm/inch)	E3V45SSR00	E3V45SSR10	E3V55SSR00	E3V55SSR10	E3V55SS00	E3V55SS10	E3V65SSS00	E3V65SSS10	E3V45SWR00	E3V45SWR10	E3V55SWR00	E3V55SWR10	E3V45CWR00	E3V45CWR10	E3V55CWR00	E3V55CWR10	E3V65CWS00	E3V65CWS10
Stator type	Bipolar								Bipolar									
Fittings (in/out)	18 -22 mm		22-28 mm						3/4" - 7/8"								7/8" - 1"+1/8"	
Size (mm)	45	55			65				45	55							65	
Sight glass	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-	YES	-

E²V-CW for transcritical CO₂ (PS 140 barg)

Specifications (mm)	E2V03CWAC0	E2V05CWAC0	E2V09CWAC0	E2V11CWAC0	E2V14CWAC0	E2V18CWAC0	E2V24CWAC0
Stator type	not included (E2VSTAS220)						
Fittings (in/out)	3/8" - 3/8" ODF						
Size (mm)	03	05	09	11	14	18	24
Sight glass	-						

E³V-CW for transcritical CO₂ (PS 140 barg)

Specifications (mm/inch)	E3V30CWM00	E3V35CWM00	E3V45CWM00	E3V55CWR00	E3V65CWR00
Stator type	Bipolar				
Fittings (in/out)	16 mm (5/8" - 5/8" ODF)		22 mm ID (7/8" - 7/8" ODF)		
Size (mm)	30	35	45	55	65
Sight glass	-				

Valve sizing table

Maximum cooling capacity (kW) based on evaporation temperature (°C)	Valve type											
	E2V								E3V			
	03	05	09	11	14	18	24	30	35	45	55	65
R404A												
0 °C	1,04	1,47	2,45	4,30	6,80	9,20	18,50	27,70	37,50	66,00	97,00	130,00
-10 °C	1,05	1,48	2,48	4,34	6,80	9,30	18,60	28,00	37,90	66,00	98,00	131,00
-30 °C	1,00	1,42	2,37	4,15	6,50	8,90	17,80	26,60	36,20	64,00	94,00	125,00
R410A												
7 °C	1,65	2,35	3,95	6,90	10,90	14,80	29,8	44,5	60,5	106,0	175,0	210,00
0 °C	1,78	2,50	4,15	7,30	11,50	15,70	31,0	46,5	63,5	112,0	165,0	220,00
-10 °C	1,80	2,60	4,35	7,60	11,90	16,30	32,5	48,5	66,0	115,0	172,0	229,00
R407C												
7 °C	1,47	2,10	3,50	6,10	9,60	13,00	26,00	39,00	53,00	93,00	137,00	183,00
0 °C	1,53	2,15	3,60	6,30	9,90	13,50	27,00	40,50	55,00	96,00	142,00	191,00
-10 °C	1,57	2,22	3,70	6,50	10,20	13,90	27,50	41,50	56,00	99,00	146,00	195,00
R407F												
0 °C	1,63	2,30	3,80	6,70	10,50	14,30	28,50	43,20	58,50	103,00	152,00	202,00
-10 °C	1,67	2,34	3,94	6,85	10,80	14,80	29,50	44,40	60,40	105,00	155,00	207,00
-30 °C	1,68	2,35	3,95	6,86	10,90	14,80	29,60	44,50	60,40	105,00	156,00	208,00
R134a												
7 °C	1,11	1,58	2,64	4,55	7,20	9,80	19,80	29,50	40,30	70,00	104,00	139,00
0 °C	1,14	1,60	2,66	4,65	7,40	10,10	20,10	30,30	41,00	72,00	106,00	142,00
-10 °C	1,12	1,61	2,63	4,60	7,20	10,10	19,60	29,30	40,00	71,00	104,00	139,00
R448A												
0 °C	1,46	2,05	3,45	6,02	9,50	12,90	25,90	38,70	52,50	92,00	136,00	182,00
-10 °C	1,49	2,12	3,52	6,15	9,70	13,30	26,50	39,50	53,80	95,00	140,00	186,00
-30 °C	1,47	2,10	3,50	6,10	9,60	13,10	26,20	39,20	53,20	94,00	138,00	184,00
R449A												
0 °C	1,43	2,02	3,38	5,90	9,30	12,70	25,30	38,00	51,50	90,00	133,00	178,00
-10 °C	1,46	2,07	3,45	6,05	9,50	13,00	25,90	38,90	52,50	92,00	137,00	182,00
-30 °C	1,45	2,05	3,40	5,95	9,40	12,80	25,60	38,30	52,00	91,00	135,00	180,00
R452A												
7 °C	1,10	1,56	2,61	4,56	7,20	9,80	19,50	29,30	39,60	70,00	103,00	138,00
0 °C	1,11	1,58	2,62	4,60	7,20	9,90	19,80	29,60	40,10	70,00	104,00	139,00
-10 °C	1,06	1,51	2,51	4,40	6,90	9,40	18,90	28,30	38,40	67,00	99,00	133,00
R513A												
7 °C	0,90	1,28	2,13	3,71	5,80	8,00	16,00	23,80	32,50	57,00	84,00	112,00
0 °C	0,93	1,31	2,20	3,83	6,00	8,20	16,50	24,80	33,50	58,00	87,00	115,00
-10 °C	0,94	1,32	2,22	3,85	6,10	8,30	16,60	25,00	33,70	59,00	88,00	117,00
R1234ze												
0 °C	0,81	1,15	1,91	3,35	5,30	7,10	14,30	21,50	29,20	51,00	76,00	101,00
-10 °C	0,83	1,19	1,98	3,47	5,40	7,40	14,80	22,30	30,20	53,00	78,00	105,00
-30 °C	0,85	1,20	2,00	3,51	5,50	7,50	15,00	22,50	30,60	54,00	79,00	106,00

Condensing temperature = 45°C, subcooling = 4°K. (The maximum cooling capacity refers to the valve when fully open)

Valve sizing table for CO₂

Maximum cooling capacity (kW) based on evaporation temperature (°C)	Valve type													
	E2V								E3V					
	03	05	09	11	14	18	24	30	35	30	35	45	55	65
R774														
0 °C	1,30	1,90	3,10	5,50	8,70	11,80	23,70	35,60	48,20	49,90	61,00	83,20	111,00	143,50
-10 °C	2,10	2,90	4,90	8,70	13,70	18,60	37,30	56,00	75,70	77,90	95,90	130,80	174,40	225,40
-30 °C	2,80	4,00	6,70	11,80	18,60	25,40	50,80	76,30	105,30	106,80	130,60	178,10	237,40	290,00

Receiver pressure = 40 bars, subcooling = 0 °K. (The maximum cooling capacity refers to the valve when fully open)

1 ph protection modules and direct 3 ph power modules



Protection and power modules, IP65, available in the version for modular connection to the cold room panel. Single-phase version with protection via residual-current circuit breaker and management of loads up to 3HP. Three-phase version with four-pole circuit breaker and management of defrosts up to 11 kW and evaporator fans up to 4 kW.

Plus




direct management




electromechanical protection

Specifications	WM00P000NN	WM00P0003N	WT00SD00NO	WT00CBF0NO	WT00CCG0NO	WT00CDG0NO
Main	1ph residual-current circuit breaker	1ph residual-current circuit breaker and 3 HP contact relay	3ph defrost	3ph defrost and 1/3ph evaporator fans		
Compatibility	SmartCella, UltraCella					
Dimensions	128x290x110 mm					
Front ingress protection	IP65					
Power supply	230 Vac	400 Vac				
Main protection (circuit breaker)	20 A @ 230 Vac	16 A @ 400 Vac	6 A @ 400 Vac	10 A @ 400 Vac	16 A @ 400 Vac	
Panel protection (fuse)	-		6 A @ 230 Vac			
Inputs						
Other inputs provided (contact)	-			Evaporator fan thermal protection, safety thermostat (defrost)		
Outputs						
1ph support relay	-	3HP (30A res.)	-	-	-	-
400 V defrost	-	-	11000 W - 3ph	4000 W - 3ph	7000 W - 3ph	11000 W - 3ph
400 V/230 V evaporator fans	-	-	-	3000 W - 3ph / 1100 W - 1ph	4000 W - 3ph / 1700 W - 1ph	4000 W - 3ph / 2200 W - 1ph

Functional diagram

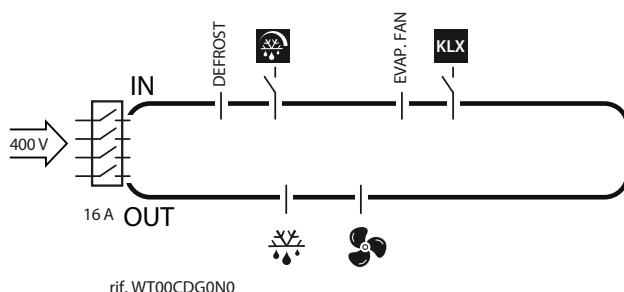

Product part number

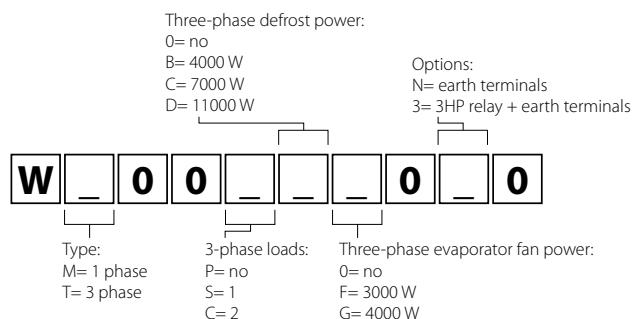

Remote 3ph power modules



Protection and power modules, IP56, for remote serial connection to UltraCella. Version for management of three-phase evaporator only with defrost up to 20 kW or version for complete management of three-phase cold room with compressor up to 20 A.

Plus



remote management




electromechanical protection




configurable by UltraCella

Specifications	WT00E600NO	WT00E900NO	WT00EA00NO	WT00F4B0NO	WT00F7C0NO
Main	Evaporator module 6 kW	Evaporator module 9 kW	Evaporator module 20 kW	Full module 4 HP	Full module 7.5 HP
Dimensions	452x380x186 mm				
Ingress protection	IP56				
Power supply	400 Vac				
Protection functions					
Compressor (manual motor starter)	-			10 to 16 A	16 to 20 A
Evaporator, condenser, defrost (circuit breaker)	16 A	25 A	40 A	16 A	25 A
Inputs					
Defrost/auxiliary defrost probe (type)	2 (NTC)				
Condenser probe (type)	-			1 (NTC)	
Condenser fan speed control	-			YES	
Evaporator safety devices (contact)	Safety thermostat (defrost), thermal protection (evaporator fans)				
Other inputs provided (contact)	-			Compressor Kriwan, high/low pressure switch, pump down	
Outputs					
Compressor	-			10 to 16 A	16 to 20 A
Defrost	6000 W - 3ph	9000 W - 3ph	20000 W - 3ph	6000 W - 3ph	9000 W - 3ph
Evaporator fan	550 W - 3ph / 0 to 10 Vdc	2000 W - 3ph / 0 to 10 Vdc	4000 W - 3ph / 0 to 10 Vdc	550 W - 3ph / 0 to 10 Vdc	2000 W - 3ph / 0 to 10 Vdc
Condenser fan 1/2	-			800 W - 1ph	
Other outputs	AUX configurable, solenoid valve				compressor crankcase heater, power supply Kriwan
	-				
Other specifications					
Connectivity (serial) RS485	YES				

Functional diagram

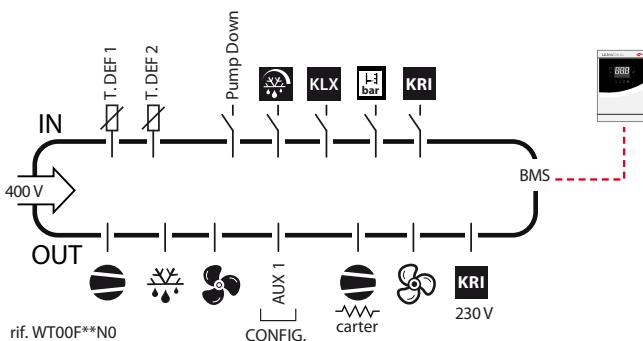

Product part number

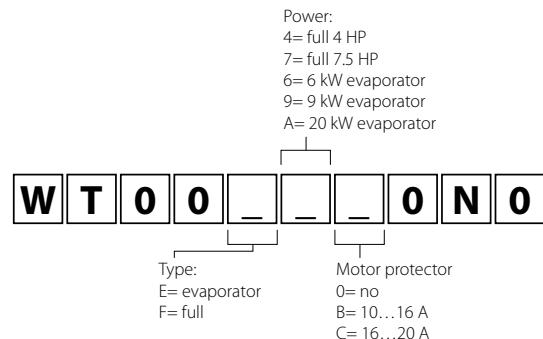

Connectivity

boss mini



System for monitoring, management and optimisation of small-medium installations. Full compatibility with mobile devices and built-in WiFi allow direct and simple access to the system, including during installation and configuration. Plug-ins are available

that enable advanced features (for information, contact your local dealer)

Accessories

BMESTPWA00: 230 Vac power supply.

Specifications	BMESTOOLEO	BMESTOOREO	BMESTOORSO
Version	advanced	basic	basic
Number of devices/variables logged	50/500	50/500	30/300
Dimensions	143x100x30 mm		
Power supply	24 Vdc (optional 230 Vac power supply)		
Hardware			
Built-in Wi-Fi connectivity to mobile devices	YES	NO	NO
Video output	YES: micro HDMI	NO	NO
Double Ethernet port (separation of LAN/Internet connections)	YES		
Built-in backup memory expansion	YES with SD card		
Embedded RS485 ports	1 opto-isolated 1 not opto-isolated		
Built-in digital outputs	3 outputs powered at +24Vdc		
USB host ports	1		
Status LED	2 front (ON/OFF, alarm)		
Possibility to connect an external UMTS modem to send SMS messages	YES		
Software			
Web connection with encrypted protocol (HTTPS)	YES		
Third-party device integration	YES (using device creator tool)		
Minimum variable sampling time	30 sec		
Other specifications	Modbus RTU master prot; Modbus TCP/IP master prot; send emails, send instant messages (Telegram), send SMS; manual and/or automatic reports as CSV and PDF; scheduled activity management		

I-O Logger



10 or 20 channel logging system for monitoring and recording at regular intervals temperature, pressure and humidity values, digital inputs and alarms. All of the information can be viewed on the built-in touch display and exported via USB key, printed and sent by email.

The devices in the installation can be integrated via an RS485 serial connection.

Specifications	PW3C000TP100	PW3C000TP200
Number of input channels	10	20
Built-in digital outputs	2	
Number of devices/variables logged	15/300	
Dimensions	380x300x120 mm	
Front ingress protection	IP56	
Power supply	230 Vac max 50W	
Main display	LCD TFT, 800x480 (WVGA), resistive touch, 64k colours	
Connectivity	2 LAN ports (internal switch); 2 embedded RS485 ports	
Storage	1 USB and 1 SD card slot	
Configurable variable sampling time	30 sec, 1 min, 3 min, 5 min, 15 min (default=15min)	
Data log capacity	1 year with sampling frequency = 15 minutes	
Other specifications	Send emails; manual and/or automatic reports in CSV format	

Accessories

Centrifugal humidifier - humiDisk



Compact centrifugal humidifier, with atomisation by spinning disk. It operates with both mains and demineralised

water, automatic emptying of the tank after each operating cycle.

Specifications	UC0100DK00	UC0650D000	UC0650D100
main	humiDisk10; capacity: 1 kg/h	humiDisk65; capacity: 6.5 kg/h	humiDisk65; capacity: 6.5 kg/h
Dimensions	312x302x390 mm	565x505x610mm	
Power supply	230 Vac max 50 W		
Operating conditions	1 to 35 °C		-2 to 35 °C
Other specifications	piping + wall bracket kit	-	frost protection heater

ColdWatch



Trapped personnel alarm kit, safety device for low temperature cold rooms, compliant with EN 378-1. Kit comprising an external control unit with siren, flashing light, backup battery

and emergency button (mushroom-head with light). On request, versions are available for Denmark, Australia, Portugal, Sweden, Poland, the Netherlands.

Specifications	CM00006079	CM00005953	CM00006080	CM00006081	CM00006056	CM00006237	CM00006433
Main (language)	Italian	English	Spanish	German	French	Portuguese	Swedish
Dimensions	external control unit: 200x240x88mm; button: 64x70x73mm						
Power supply	mains: 230 Vac; backup battery: 12 Vdc 2 Ah						
Operating conditions	external control unit: -10 to 40°C, button: -25 to 40 °C						
Ingress protection	external control unit: IP54, button: IP65						
Auxiliary relay	5 A 250 Vac - NC or NO logic, selectable						

Refrigerant gas leakage detector



Refrigerant gas leak detectors with built-in or remote sensor. Integration with CAREL or third-party controllers via analogue, digital or RS485 serial communication. On request, version

available with complete 230 Vac panel with flashing light and siren.

Specifications	GDW*S02A00	GDW*S04A00	GDW*S06A00	GDW*S08A00	GDW*S09A00	GDW*S11A00	GDW*S18A00	GDW*S120A00
Refrigerant	R134a	R404A	R407F	R448A	R449A	R452A	R513A	R744
Dimensions	built-in: 165x165x87 mm - remote: 115x136x68 mm							
Power supply	24 Vac / 19.5-28.5 Vdc							
Operating conditions	from -40°C to 50°C							
Ingress protection	IP66							
Outputs	1 analogue output: 4-20 mA, 0-5 V, 0-10 V, 1-5 V, 2-10 V - 3 digital outputs							
Communication	Bluetooth - RS485 Modbus serial							

* : B = built-in sensor, R = remote sensor

Sensors



Range of sensors and transducers for measuring temperature, temperature/humidity and pressure. Suitable for installation inside the cold room and/or on the evaporator.

		Description	Operating conditions	Cable length (m)	
Active sensors - temperature and humidity					
		DPPC112000	Power supply: 18/32 Vdc - 12/24 Vac Output: 0 to 10 Vdc	Temperature (-10 to 60°C) and humidity (10 to 90% RH)	
		DPPC212000	Power supply: 18/32 Vdc - 12/24 Vac Output: 0 to 10 Vdc	Temperature (-20 to 70 °C) and humidity (0 to 100 % RH)	
		DPPC110000	Power supply: 8/32 Vdc - 12/24 Vac Configurable output: -0.5 to 1 Vdc or 4 to 20 mA	Temperature (-10 to 60°C) and humidity (10 to 90% RH)	
		DPPC210000	Power supply: 8/32 Vdc - 12/24 Vac Configurable output: -0.5 to 1 Vdc or 4 to 20 mA	Temperature (-20 to 70 °C) and humidity (0 to 100% RH)	
Temperature sensors					
		NTC015HP03	NTC HP probe	-50 to 105 °C	
		NTC030HP03	NTC HP probe	-50 to 105 °C	
		NTC060HP03	NTC HP probe	-50 to 105 °C	
		NTC030HF03	NTC HF probe (strap-on)	-50 to 90 °C	
		NTC060HF03	NTC HF probe (strap-on)	-50 to 90 °C	
Ratiometric pressure transducers					
		SPKT005P0	0 to 5 V ratiometric	-1 to 4.2 bars	
		SPKT0013P0	0 to 5 V ratiometric	-1 to 9.3 bars	
		SPKT00E3P0	0 to 5 V ratiometric	-1 to 12.8 bars	
		SPKT0043P0	0 to 5 V ratiometric	0 to 17.3 bars	
		SPKT00F3P0	0 to 5 V ratiometric	0 to 20.7 bars	
		SPKT0033P0	0 to 5 V ratiometric	0 to 34.5 bars	
		SPKT00B6P0	0 to 5 V ratiometric	0 to 45 bars	
		SPKT00G1S0	0 to 5 V ratiometric	0 to 60 bars	
		SPKT00L1S0	0 to 5 V ratiometric	0 to 90 bars	
4 - 20 mA pressure transducers					
		SPKT0021C3	4 to 20 mA	-0.5 to 7 bars	
		SPKT0011C3	4 to 20 mA	0 to 10 bars	
		SPKT0041C0	4 to 20 mA	0 to 18.2 bars	
		SPKT0031C3	4 to 20 mA	0 to 30 bars	
		SPKT00B1C3	4 to 20 mA	0 to 44.8 bars	
		SPKT00G1C0	4 to 20mA	0 to 60 bars	
Pressure sensor cables					
		SPKC002313	Cable with IP67 connector	-20 to 105 °C	
		SPKC005313	Cable with IP67 connector	-20 to 105 °C	
		SPKC00A310	Cable with IP67 connector	-20 to 105 °C	

Information and support

In addition to the corporate website www.carel.com and the Customer Service department, available at cst@carel.com, CAREL provides a series of before- and after-sales support services on its products and solutions.

Tools



Electronic valve sizing tool

Available for air-conditioning and refrigeration applications, including for CO₂ systems.

<https://exvselectiontool.carel.com/ExvLab/index.jsp>



Knowledge sharing area

- Before- and after-sales training and support material;
- software for updating products and supervision systems;
- document repository: certification and declarations.

<https://ksa.carel.com>



Quick Finder

the selection tool for refrigeration applications, designed and developed for distributors and installers. Available for Android and IOS

<https://www.carel.com/apps>



Video

The official CAREL You Tube channel features videos presenting the CAREL product solutions, tutorials for correct installation and configuration, interviews during exhibitions and events and much more.



CAREL UltraCella installation



CAREL E2V-Z tutorial



CAREL boss tutorial



Headquarters ITALY

CAREL INDUSTRIES HQs
Via dell'Industria, 11
35020 Brugine - Padova (Italy)
Tel. (+39) 0499 716611
Fax (+39) 0499 716600
carel@carel.com



For more information

CAREL Poland
ALFACO POLSKA
www.carel.pl

CAREL Asia
www.carel.hk

CAREL Australia
www.carel.com.au

CAREL Central & Southern Europe
www.carel.com

CAREL Czech & Slovakia
CAREL spol. s.r.o.
www.carel.cz

CAREL Deutschland
www.carel.de

CAREL China
www.carel-china.com

CAREL France
www.carelfrance.fr

CAREL Korea
www.carel.kr

CAREL Ibérica
www.carel.es

CAREL Ireland
FarrahVale Controls & Electronics Ltd.
www.carel.ie

CAREL Italy
www.carel.it

CAREL India
www.carel.in

CAREL Japan
www.carel-japan.com

CAREL Mexicana
www.carel.mx

CAREL Middle East
www.carel.ae

CAREL Nordic
www.carelnordic.se

CAREL Russia
www.carelrussia.com

CAREL South Africa
www.carelcontrols.co.za

CAREL Sud America
www.carel.com.br

CAREL Thailand
www.carel.co.th

CAREL Turkey
CFM Sogutma ve Otomasyon San. Tic. Ltd.
www.carel.com.tr

CAREL U.K.
www.careluk.com

CAREL U.S.A.
www.carelusa.com